


SBBL36

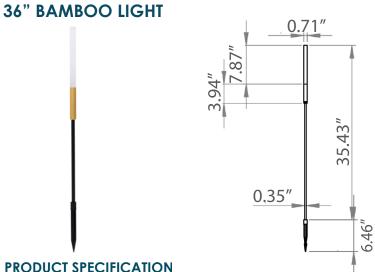

PRODUCT SPECIFICATION

()

VIOHS

IP 65

Diffuser Base Material	Aluminium			
Diffuser Base Finish	Glossy Gold			
Stem Material	Brass			
Stem Finish	Powder Coated Textured Black			
Stake Material	Aluminium			
Stake Finish	Powder Coated Textured Black			
Diffuser	РММА			
Binning	3 Step MacAdam			
Wiring	1 Meter of 2 core 0.5mm ² rubber cable			
Life Span	50,000 hours			

LED Type	NICHIA			
Power Consumption	2W			
Input Voltage	12VAC 50/60Hz or 12VDC			
Height	35.43 inches			
Operating Temperature	from -4° to 149° F			
Color Rendering Index	>85			
Warranty	3 years against manufacturing defects			
Agency Approval	CE, RoHS			

Standard offering of fixture is 3000K and 120° Beam Spread. Other color temperatures (2700K, 4000K & 6000K) are available as a special order. Special orders require a minimum of 100 units and lead times for special orders are 8 weeks. Special orders require a 50% deposit on materials and any expedited freight charges will be the responsibility of the client.

Power Available color (W) Temperatures	Luminous Flux		IP Rating	Available		
	3000К	4000K	6000K	ir kuning	Beam Angles	
2W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	120°

CAST Lighting, LLC, 1120 Goffle Rd., Hawthorne, NJ 07506