




SBBL44

44" BAMBOO LIGHT

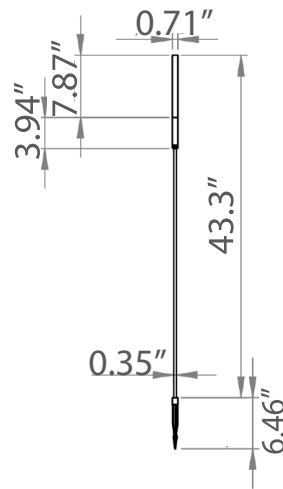

PRODUCT SPECIFICATIONS

Diffuser Base Material	Aluminium
Diffuser Base Finish	Glossy Gold
Stem Material	Brass
Stem Finish	Powder Coated Textured Black
Stake Material	Aluminium
Stake Finish	Powder Coated Textured Black
Diffuser	PMMA
Binning	3 Step MacAdam
Wiring	1 Meter of 2 core 0.5mm ² rubber cable
Life Span	50,000 hours

LED Type	NICHIA
Power Consumption	2W
Input Voltage	12VAC 50/60Hz or 12VDC
Height	43.3 inches
Operating Temperature	from -4° to 149° F
Color Rendering Index	>85
Warranty	3 years against manufacturing defects
Agency Approval	CE, RoHS

Standard offering of fixture is 3000K and 120° Beam Spread. Other color temperatures (2700K, 4000K & 6000K) are available as a special order. Special orders require a minimum of 100 units and lead times for special orders are 8 weeks. Special orders require a 50% deposit on materials and any expedited freight charges will be the responsibility of the client.



Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
2W	2700K 3000K 4000K 6000K	110lm/W	120lm/W	130lm/W	65	120°